

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
18 August 2005 (18.08.2005)

PCT

(10) International Publication Number
WO 2005/075612 A1

(51) International Patent Classification: C10M 173/02

(21) International Application Number:
PCT/GB2004/004499

(22) International Filing Date: 26 October 2004 (26.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0402517.7 5 February 2004 (05.02.2004) GB

(71) Applicant (for US only): NICHE PRODUCTS LIMITED (GB/GB); Printshop Lane, Atherton, Manchester M46 9BJ (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): ASKEW, Dean, Anthony (GB/GB); 21 Hatchery Close, Warrington WA4 4TF (GB).

(74) Agents: NEILL, Alastair, William et al.; Appleyard Lees, 15 Clare Road, Halifax HX1 2HY (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GR, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: HYDRAULIC FLUIDS

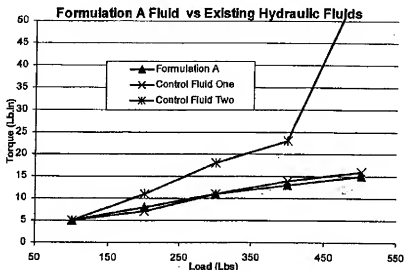

(57) Abstract: Invention relates to an aqueous hydraulic fluid comprising, in addition to water, at least one phospholipid lubricant, wherein the hydraulic fluid comprises less than 20% by weight of an oil selected from a mineral oil, a synthetic hydrocarbon oil or any mixture thereof. Preferably the or each phospholipid lubricant comprises a plant-derived lecithin.